

# Chainmaster



**Simple fully adjustable oil lubrication for bearings and chains**

**Electrically operated 12V fully adjustable oil pump protects critical moving parts by feeding oil constantly to sprockets and chains.**

## System Principal

- Each chain supplied accurate pre-determined ratio of oil governed by meter unit restrictors.
- Each meter unit incorporates a non return valve and is available in a choice of 8 flow rates to allow a wide variety of lubricant requirements to be fed by a single system.
- Frame mounted manifold blocks interrupt the primary line to allow meter units to be mounted close to lubrication points.
- Overall output is easily adjusted at the pump to allow for changing operating conditions.

Meter units ensure each point receives the correct ratio of oil.

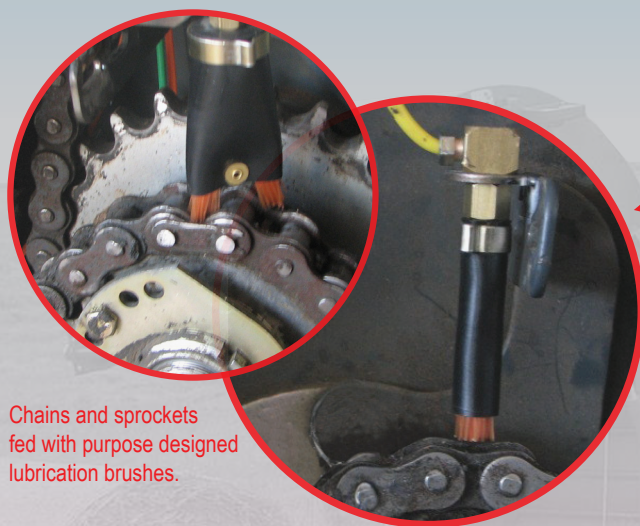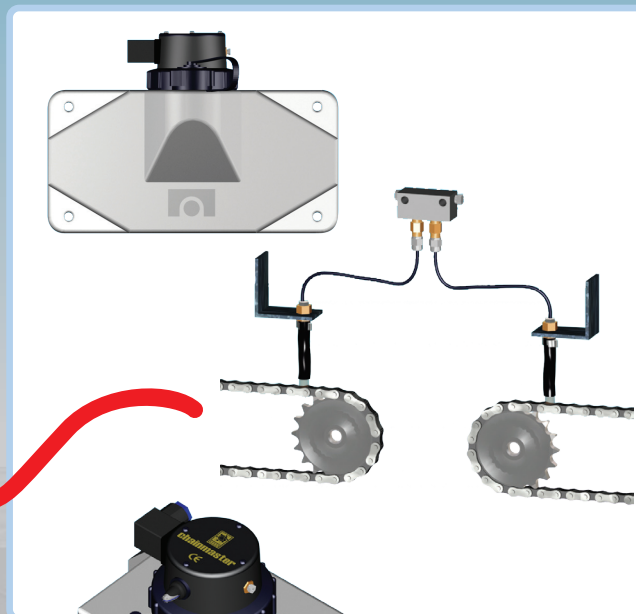

Chains and sprockets fed with purpose designed lubrication brushes.

**Constant oil lubrication is safer, reduces machine downtime & can considerably extend component life**

**No Special oils required. Uses all basic engine oils (SAE30) to API/CC or API/CD specifications**

## Specifications

<b>Capacity:</b>	3.5 or 7 litre option
<b>Voltage:</b>	12V
<b>Filter:</b>	nominal 50 micron paper element
<b>Mounting:</b>	M8 x 2 / M8 x 4
<b>Output:</b>	0-15cc/min max nominal ambient free flow
<b>Current:</b>	1.5A max