


Minimaster

**Adjustable automatic oil lubrication for bearings, chains & sprockets.
Purpose designed for agricultural field equipment.**

Benefits

- A choice of reservoirs supply filtered oil to the pump.
- Pump operated by adjustable cam or reciprocal machine cycle.
- Easily adjustable overall output to suit varying operating conditions via unique adjustable cam offering a choice of 8 preset outputs.
- Protected nylon brushes ensure a reliable and accurate feed of oil onto the chains ensuring pins are well lubricated.
- A single system oils bearings and chains of any size in any combination.
- Helps keep chains oiled above the level where dust collects and grinding paste can form.

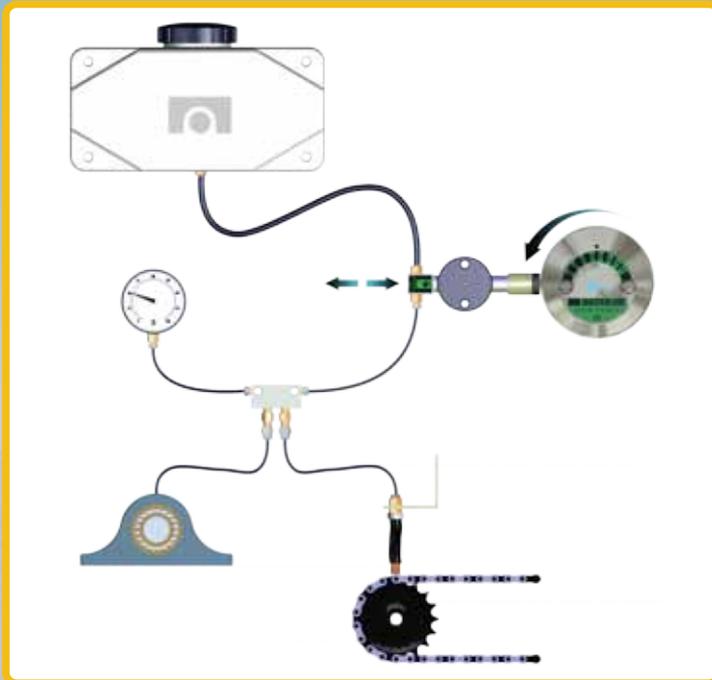

Meter units ensure each point receives the correct ratio of oil



Applications

Ideal for round baler chain lubrication.

Industrial, food processing and agricultural machinery.

All applications where reliable oil lubrication is needed.

Specifications

Oil:	Standard engine oil (SAE30) all oils to API/CC & API/CD specifications
Output pressure:	up to 250 psi
Max output:	2cc per stroke max (PMM2C/CD) or 6cc per stroke (PMXC)
Temperature:	+40 -15c
Pump mounting:	6mm x 2 / 8mm x 2
Reservoir Capacity:	1 or 2 US gallons/3.5 or 7 litres
Secondary lines:	5/32 4mm diameter nylon
Reservoir feed:	8mm neoprene